


INSTALLATION INSTRUCTIONS - P-GRIP 22

WARNING: Before beginning the installation process prioritize safety by ensuring the firearm is unloaded, the chamber is empty, the safety is engaged, and the firearm REMAINS pointed in a safe direction.

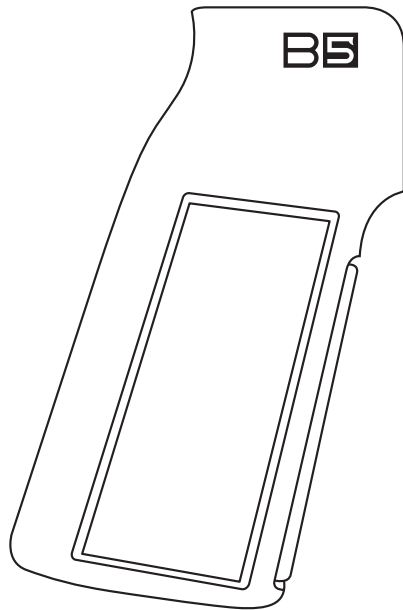

Follow these step-by-step instructions for the removal and re-installation of Components, adhering to safety protocols throughout.
If necessary, carefully remove the existing grip in accordance with the manufacturer's recommendations, taking care to avoid any damage to the receiver.
Materials Provided - P-Grip 22, T30 Screw
Tools Required - T30 Torx Bit

IMPORTANT NOTE: Retain the safety detent spring during removal




FIG 1

Place the safety detent spring into the grip.




FIG 2

Aligning it correctly with the lower, slide the grip into place on the rifle, making sure the spring aligns properly.




FIG 3

Using a T30 torx bit and the provided screw, install the grip onto the firearm. exercise caution to not overtighten during the installation process.