


## INSTALLATION INSTRUCTIONS - P-GRIP 23

**WARNING:** Before beginning the installation process prioritize safety by ensuring the firearm is unloaded, the chamber is empty, the safety is engaged, and the firearm REMAINS pointed in a safe direction.

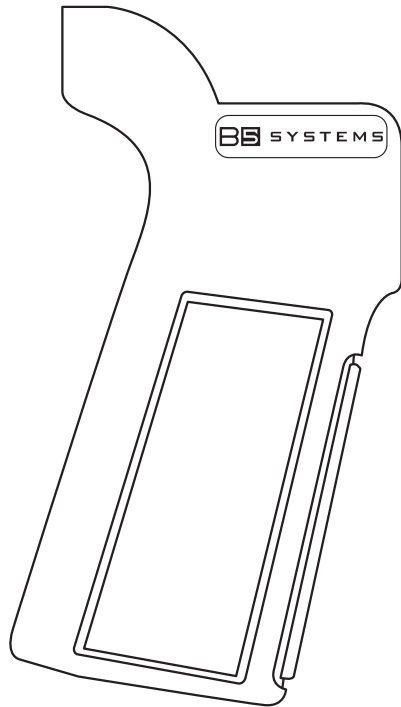

Follow these step-by-step instructions for the removal and re-installation of Components, adhering to safety protocols throughout.  
If necessary, carefully remove the existing grip in accordance with the manufacturer's recommendations, taking care to avoid any damage to the receiver.  
**Materials Provided** - P-Grip 23, T30 Screw  
**Tools Required** - T30 Torx Bit

**IMPORTANT NOTE:** Retain the safety detent spring during removal




FIG 1

Place the safety detent spring into the grip.




FIG 2

Aligning it correctly with the lower, slide the grip into place on the rifle, making sure the spring aligns properly.




FIG 3

Using a T30 torx bit and the provided screw, install the grip onto the firearm. exercise caution to not overtighten during the installation process.